

13×13mm Light Bar Display
Technical Data Sheet

Model No.: KWL-R154XBW

Features:

- ◇ Industrial standard size.
- ◇ Low power consumption.
- ◇ Categorized for luminous intensity.
- ◇ The product itself will remain within RoHS compliant Version.

Descriptions:




- ◇ The KWL-R154 series is 13×13mm light bar display, designed for viewing distances up to 7 meters.
- ◇ There are separate anodes and cathodes for each light segment and choice of five colors is offered.
- ◇ These devices are made with white segments and white surface.

Applications:

- ◇ Audio equipment.
- ◇ Instrument panels.
- ◇ Digital read out display.

Device Selection Guide:

Model No.	Chip Material	Face Color	Descriptions
KWL-R154ABW	InGaN	Blue	Common Anode
KWL-R154CBW		Blue	Common Cathode

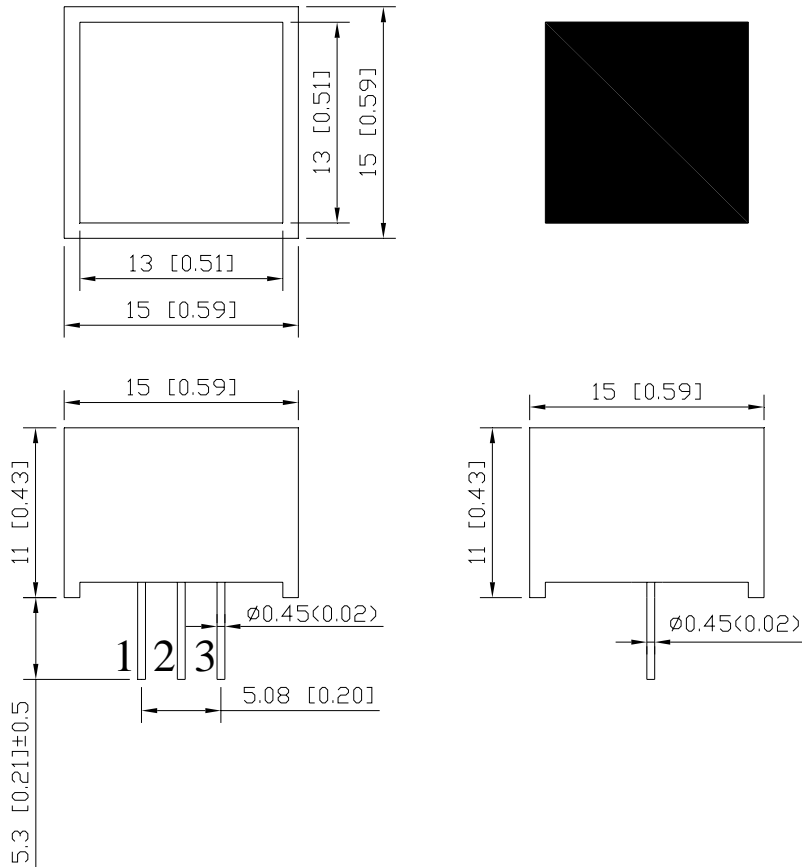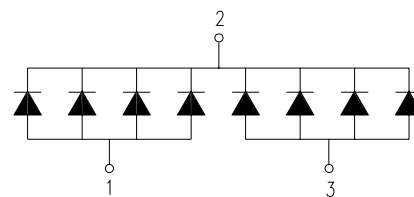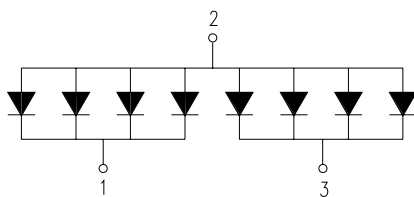Package Dimension:

KWL-R154ABW
KWL-R154CBW

Notes:

- 1.All dimensions are in millimeters (inches).
- 2.Tolerance is ± 0.25 mm (.010") unless otherwise noted.
- 3.Specifications are subject to change without notice.

Absolute Maximum Ratings at Ta=25°C

Parameters	Symbol	Max	Unit
Power Dissipation	PD	240	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	100	mA
Forward Current	IF	60	mA
Derating Linear From 50°C		0.4	mA/°C
Reverse Voltage	VR	5	V
Operating Temperature Range	Topr	-40°C to +80°C	
Storage Temperature Range	Tstg	-40°C to +100°C	
Soldering Temperature	Tsld	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	Iv	10	15	---	mcd	IF=60mA (Note 1)
Peak Emission Wavelength	λp	---	468	---	nm	IF=60mA
Dominant Wavelength	λd	---	466	---	nm	IF=60mA
Spectral Line Half-Width	Δλ	---	18	---	nm	IF=60mA
Forward Voltage	VF	---	3.6	4.0	V	IF=60mA
Reverse Current	IR	---	---	10	μA	VR=5V

Notes:


1. Luminous Intensity Measurement allowance is ± 10%.

Typical Electrical / Optical Characteristics Curves
(25°C Ambient Temperature Unless Otherwise Noted)


Spectral Radiance (Peak @ 468nm)

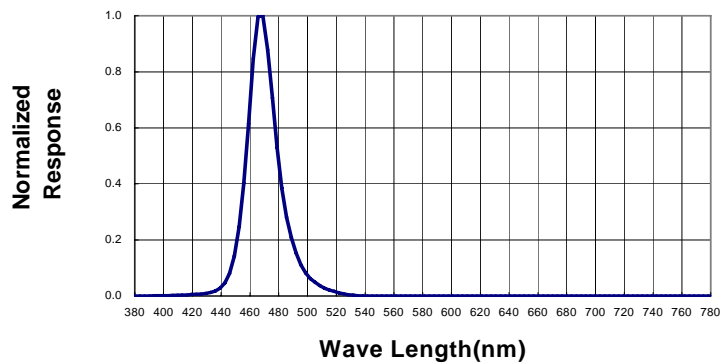

Forward Current vs Forward Voltage

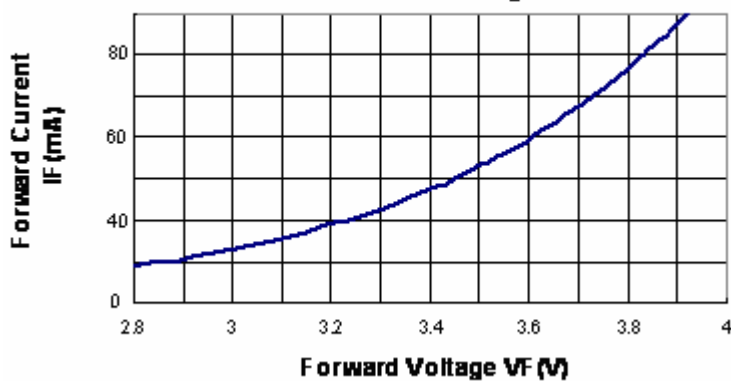

Relative Luminous Intensity vs Forward Current

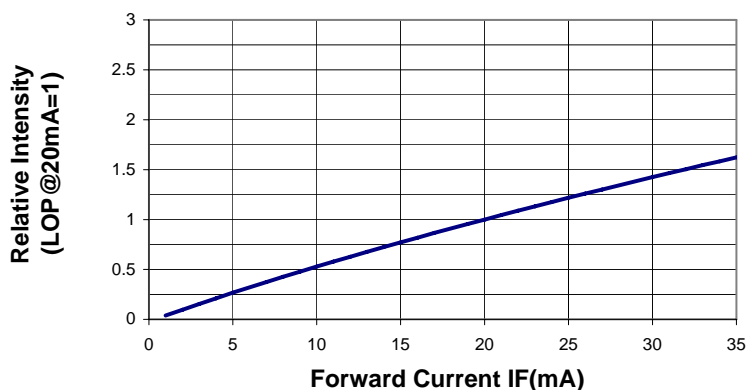

Please read the following notes before using the datasheets:

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.

2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.

3. Soldering Condition

3.1 Pb-free solder temperature profile.

3.2 Reflow soldering should not be done more than two times.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260°C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often

started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

6. Caution in ESD

Static Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices equipment and machinery must be properly grounded.